

m e n , i d e a s , t e c h n o l o g i e s



x-Ray  
*inspection*  
inspection

**XM 2**





## x-Ray inspection

XM 2


### Equipment

- Industrial PC with Pentium® processor
- SVGA graphic board
- 15" TFT monitor Touch Screen
- Alarm control
- Automatic function to view the production data
- 16 inputs
- 8 outputs
- 512 pixel sensor with 0,8mm resolution
- Rapid dismantle conveyor
- Windows interface

### Technical specifications


- Power supply 200 – 240 V 50-60 Hz single-phase
- IP55 protection
- Monoblock X Ray Generator 200W
- Pneumatic supply 6 BAR (only automatic's ejection)
- Pneumatic absorption 1NI (only automatic's ejection)
- Structure: AISI 304
- Optical signals: 3 for different machine states
- Linear speed up to 70 m/min

### Controllable product

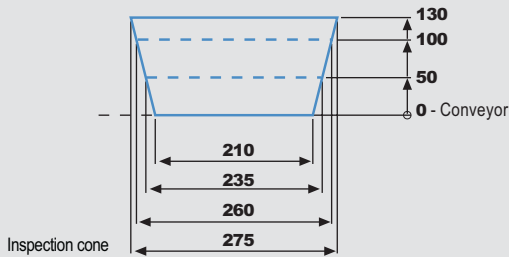

### Accessories

- Product guide
- High resolution revelation system
- IP65 protection
- Ejection check photocell
- Conformity with standards ISO HACCP
- Large range of ejection systems
- Conveyors easily and quickly removable
- Cooler 1.9kW 50Hz
- Remote data control
- Virtual contaminant simulator
- Easy data management
- Weigh-volume measure

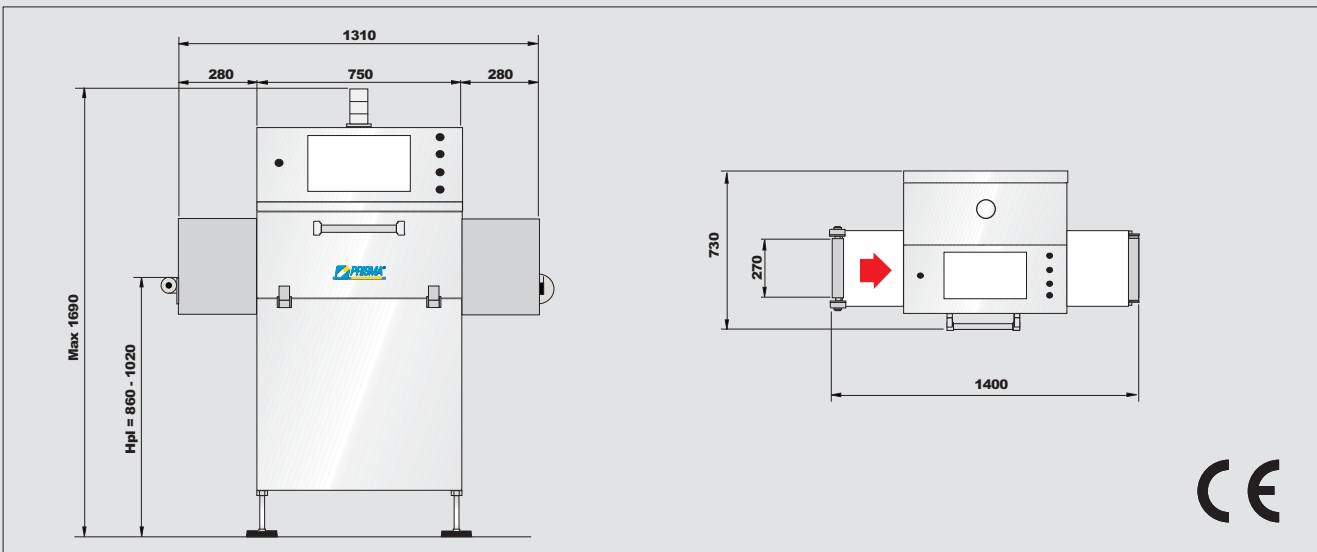

© 2002 - 2007 PRISMA INDUSTRIALE - REV 01/2007



Prisma Industriale S.r.l.

• Via La Bionda, 17 - 43036 Fidenza - Parma - Italy • Tel. +39 0524 527270 - Fax +39 0524 524142  
 • www.prismaindustriale.com • info@prismaindustriale.com

Data appearing in this brochure may be modified without prior warning.  
 The machine used in this document is with all options