


m e n , i d e a s , t e c h n o l o g i e s



detector
microleaks
detector
detector
microleaks

Sniffer® SNF12

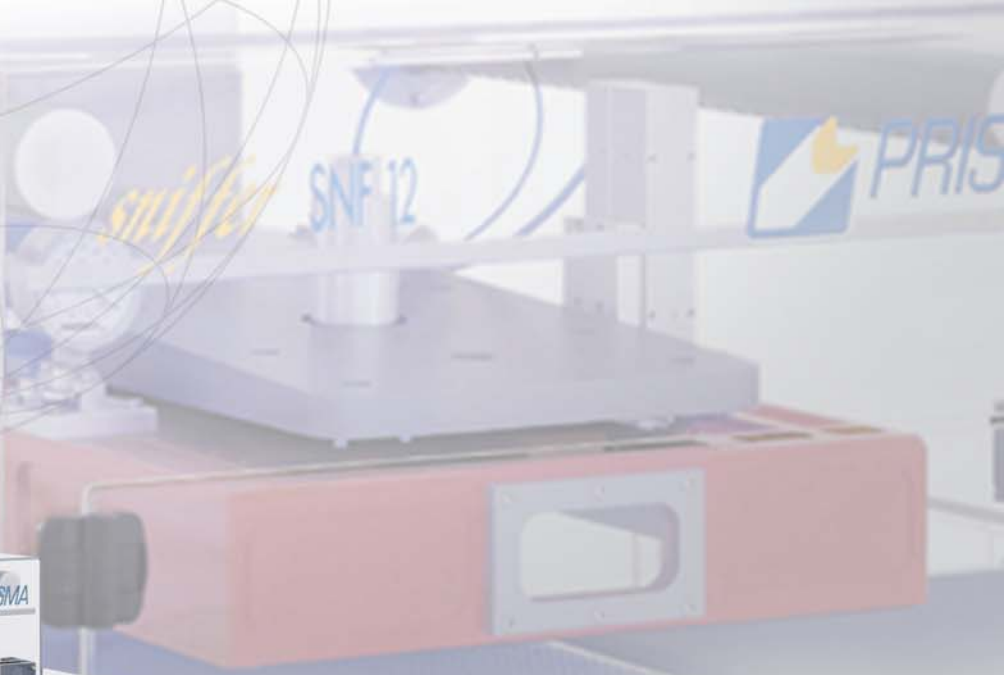



microleaks detector

Sniffer® SNF12

Equipment

- Digital electronics with alphanumeric graphic display panel
- Production data management
- Speed adjustable from keypad
- RS232 serial port
- Pneumatic ejector
- Protection tunnel with inspection door


Accessories

- Ejection systems
- Reject management systems
- Infeed and outfeed conveyors
- Lamps for alarms signalling

Technical specifications

Bell dimension	according to the product
Maximum speed	up to 15 PPM
Pneumatic supply	0,6 MPa
Air consumption (for ejection)	80 NI
Power supply	380V + N 50/60 Hz
Power consumption	3 kW
Version	Stainless steel IP65 - IP66

Sniffer® SNF12

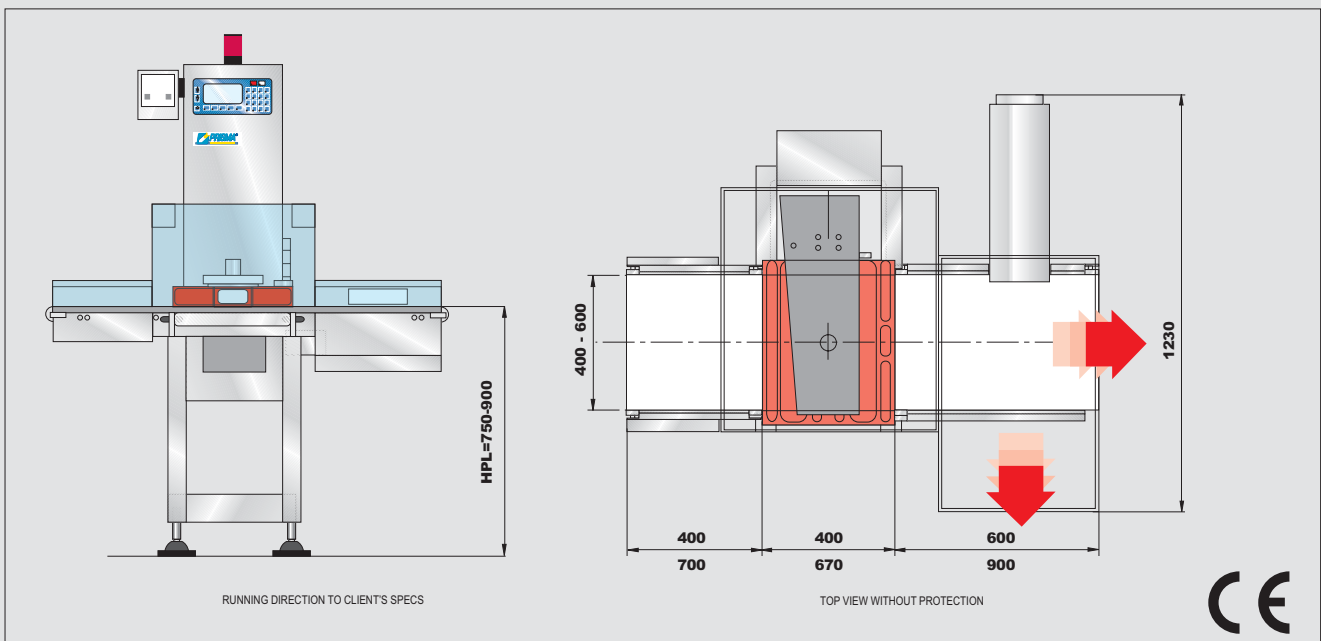

© 2002 - 2005 PRISMA INDUSTRIALE - REV 09/2005



Prisma Industriale S.r.l.

• Via La Bionda, 17 - 43036 Fidenza - Parma - Italy • Tel. +39 0524 527270 - Fax +39 0524 524142
 • www.prismaindustriale.com • info@prismaindustriale.com

Data appearing in this brochure may be modified without prior warning.
 The machine used in this document is with all options